
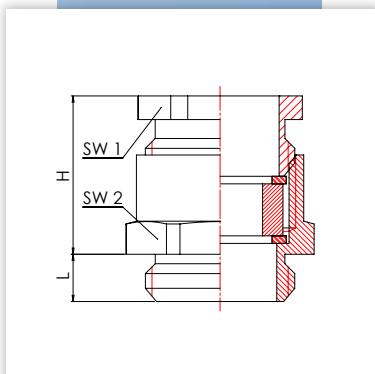


Kabelverschraubungen / Cable Glands

wege® M Classic 6-kant / hexagonal

Material	Messing vernickelt
Dichtring	<ul style="list-style-type: none"> ① NR/NBR ② CR/EPDM
Schutzklasse	IP54
Temperaturbereich	<ul style="list-style-type: none"> ① -40 °C bis +90 °C ② -30 °C bis +120 °C

material	brass nickel-plated
sealing ring	<ul style="list-style-type: none"> ① NR/NBR ② CR/EPDM
protection class	IP54
range of temperature	<ul style="list-style-type: none"> ① -40 °C bis +90 °C ② -30 °C bis +120 °C

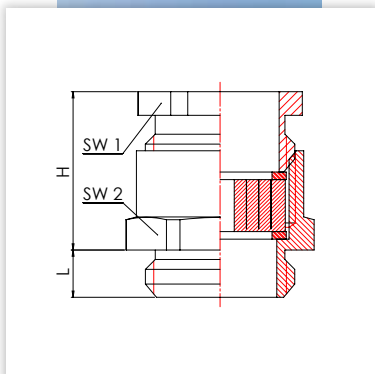

Gewinde thread		Dichtring sealing ring	SW1	SW2	H	L		Bestell-Nr. ref.-number
-------------------	--	---------------------------	-----	-----	---	---	--	----------------------------

kurzes Anschlussgewinde / short connection thread

M 12 x 1,5	4	- 6	S	②	12	14	15	5	100	111.1200.0
M 16 x 1,5	2	- 10	UNI	②	16	18	16	5	100	111.1600.7
M 16 x 1,5	8	- 10	S	②	15	18	16	5	100	110.1609.0
M 20 x 1,5	3	- 14	UNI	②	20	22	19	6	50	111.2000.7
M 20 x 1,5	8	- 10	S	①	18	22	17	6	50	110.2011.0
M 20 x 1,5	10	- 12	S	①	20	22	19	6	50	110.2013.0
M 20 x 1,5	12	- 14	S	①	22	24	20	6	50	110.2016.0
M 25 x 1,5	7,5	- 18	UNI	②	25	27	22	7	50	111.2500.7
M 25 x 1,5	17	- 19	S	①	28	30	22	7	50	110.2521.0
M 32 x 1,5	15	- 25	UNI	②	32	34	24	8	25	111.3200.7
M 32 x 1,5	26	- 27	S	①	37	39	25	8	25	110.3229.0
M 40 x 1,5	22	- 33	UNI	②	40	42	26	8	20	111.4000.7
M 40 x 1,5	23	- 34	UNI	①	47	50	30	8	10	110.4036.6
M 50 x 1,5	31	- 42	UNI	②	50	52	29	9	5	111.5000.7
M 50 x 1,5	39	- 41	S	①	54	57	34	9	5	110.5042.0
M 63 x 1,5	40	- 51	UNI	②	64	66	35	10	5	111.6300.7
M 63 x 1,5	35	- 46	UNI	①	60	66	36	10	5	110.6348.6

Pg 7	4	- 6	S	②	13	14	15	5	100	110.0700.0
Pg 9	8	- 10	S	②	15	17	16	6	100	110.0900.0
Pg 11	8	- 10	S	①	18	20	17	6	50	110.1100.0
Pg 14	10	- 12	S	①	20	22	19	6,5	50	110.1300.0
Pg 16	12	- 14	S	①	22	24	20	6,5	50	110.1600.0
Pg 21	17	- 19	S	①	28	30	22	7	50	110.2100.0
Pg 29	26	- 28	S	①	37	40	25	8	25	110.2900.0
Pg 36	23	- 34	UNI	①	47	50	29	9	20	110.3600.6
Pg 42	39	- 41	S	①	54	57	33	10	10	110.4200.0
Pg 48	35	- 46	UNI	①	60	64	36	10	5	110.4800.6

G 1/2"	7	- 13	UNI	①	20	22	20	6,5	50	110.1312.6
G 3/4"	8	- 18	UNI	②	25	27	22	7	50	110.0034.7
G 2"	35	- 45	UNI	①	60	64	36	10	5	110.0200.6